

DATASHEET

XS4 ORIGINAL WIDE by SALTO

The SALTO XS4 Original wide version is specially designed to fit most Euro profile doors and work with the majority of European mortise locks and cylinders. It is specially designed for use on busy, high traffic doors that need additional strength.

www.saltosystems.com

TECHNICAL SPECIFICATIONS: XS4 ORIGINAL WIDE Ex6xx

SALTO
inspiredaccess



⁽¹⁾ External escutcheon.



TECHNICAL DATA:

Reader dimensions (H x W x D):	290,0 x 67,0 x 20,0 mm
Weight	1,5 kg
Handle rotation:	Max. 52°
Door thicknesses:	32 mm - 120 mm
Distance from the handle to the cylinder	47 - 110 mm
Square spindles:	7mm, 7.6mm split, 8mm, 8mm split, 9mm, 9mm split.
Power source:	3 AA batteries (LR6 1,5V)
Number of openings:	40,000 - 60,000 depending on the technology
Maximum events on lock audit	650 to 1,000 events
Environmental conditions:	Outside: -20 °C / +60 °C Inside: +0 °C / +50 °C. (with Lithium batteries -20 °C / +60°C)
IP class:	IP56 (outside), IP55 (inside)
Certifications:	CE, AbP (P-120003012, DO 20.52), Ü-Zertifikat, EN 179 (DO20.52), DDA*

ID TECHNOLOGIES:

MIFARE*:•	•
BLE Smart:•	•
NFC:•	•
Legic**:•	•
HID iClass®:•	•
Picopass:•	•
i-Button:•	•

* MIFARE® (DESFire EV2, Plus, Ultralight C, Classic - ISO/IEC 14443).

** Legic Prime and Legic Advant

TECHNOLOGY PLATFORMS:**SALTO SPACE:**

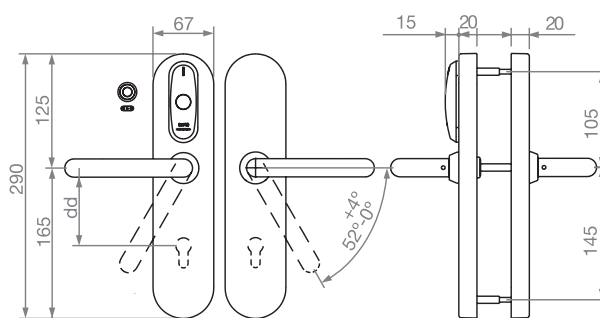
Smile - Selfprogrammable	•
ROM:	•
SVN data-on-card:	•
SALTO RFnet:	•
SALTO BLUEnet:	—

SALTO KS:

SALTO KS:	•
-----------	---

SALTO SALLIS:

SALLIS:	•
---------	---

TECHNICAL DRAWING:**OPTIONS:****Faceplate finish:**

IM Satin stainless steel:	•
IP Bright stainless steel:	•
IA Antique brass:	•
PP PVD bright brass type:	•
PM PVD satin brass type:	•
NE Black chromium:	•
BC BioCote anti-microbial:	•

Handles

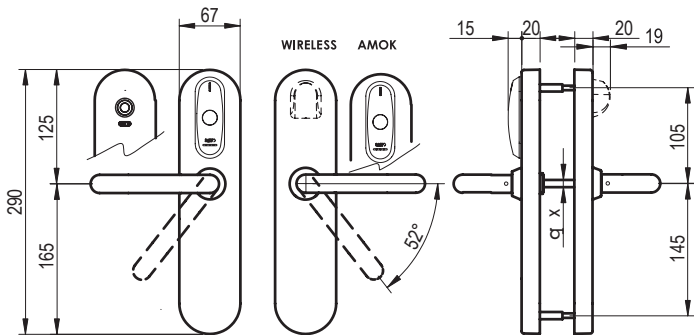
Compatible handles	U, L, W, H, S, B, P, J, T, Y, Z, O, A, N, G, K, 2, 3, 4, 5, 7
--------------------	--

OPENING MODES:

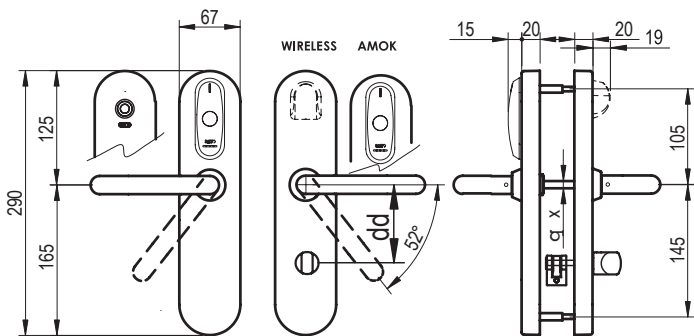
Standard:	•
Office mode:	•
Timed office:	•
Automatic opening:	•
Automatic opening + office	•
Toggle:	•
Timed Toggle:	•
Amok mode:	•
Exit leaves open mode:	•

MODELS:**MODEL 50:**

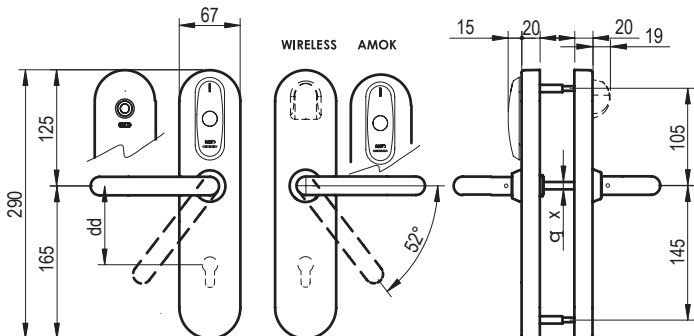
- 2 handles any type.

**MODEL 51:**

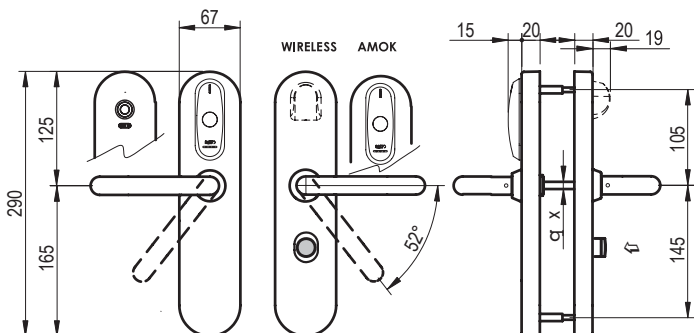
- 2 handles any type.
- Inside thumbturn.

**MODEL 52/53/54:**

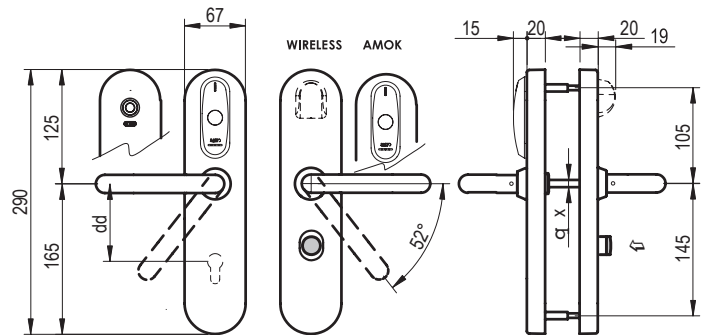
- 2 handles any type.
- Inside (models 52 / 53) / (models 54) Outside cylinder cut out.

**MODEL 56:**

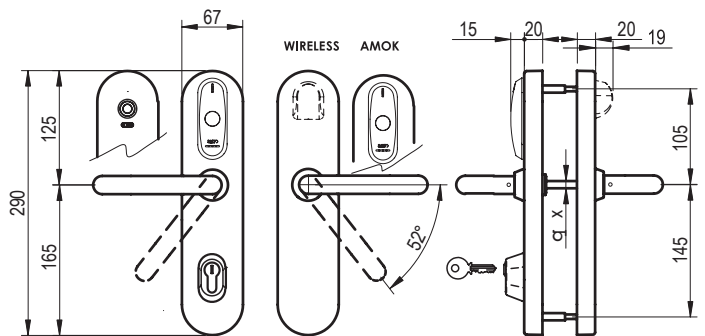
- 2 handles any type.
- Electronic “do not disturb” system (Not available in self-programmable).

**MODEL 57:**

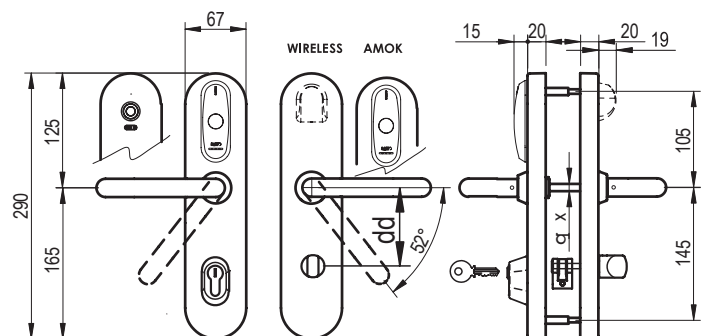
- 2 handles any type.
- Outside cylinder cut out.
- Electronic “do not disturb” system (Not available in self-programmable).

**MODEL P0:**

- 2 handles any type.
 - Built in mechanical override with audit.
- (Ex6P0 reference: Euro profile cylinder 30-10).

**MODEL P1:**

- 2 handles any type.
 - Inside thumbturn.
 - Built in mechanical override with audit.
- (Ex6P1 reference: Euro profile cylinder 30-10).

**MODEL P6:**

- 2 handles any type.
 - Electronic “do not disturb” system (Not available in self-programmable).
 - Built in mechanical override with audit.
- (Ex6P6 reference: Euro profile cylinder 30-10).

