# **DATASHEET**

# **UBOX4000** by SALTO

The UBOX4000 offers a compact solution updater kit based on a SALTO Controller and a Wall Reader that permits to integrate with third party products.

www.saltosystems.com

# TECHNICAL SPECIFICATIONS: **UBOX4000**







#### **TECHNICAL DATA:**

Housing dimensions controller (H x W x D):	131,0 x 104,0 x 43,3 mm
Weight:	0,5 kg
Cover material:	PC+ABS
Certifications:	CE, FCC/IC, RCM, EAC*

<sup>\*</sup> Only for models "A", "E" & "S" with reading technology "B"

# **ELECTRONIC FEATURES:**

Ethernet interface:	10BASE-T/100BASE-TX
DHCP Addressing:	•
RFID communication:	•
Output interfaces:	RS232 OMRON WIEGAND

#### **ID TECHNOLOGIES:**

MIFARE:*	•
Bluetooth®:	•
NFC:	•
Legic:**	•
iClass® Seos™:	•
Picopass:	_

<sup>\*</sup> MIFARE® (DESFire EV2, Plus, Ultralight C, Classic - ISO/IEC 14443).

#### **TECHNOLOGY PLATFORMS:**

#### SALTO SPACE:

Smile - Selfprogrammable	_	
ROM:	_	
SVN data-on-card:	•	
JustIN mobile NFC:	•	
JustIN mobile Bluetooth®:	•	

# SALTO KS:

SALTO KS: -


# **SALTO SALLIS:**

SALLIS: –

#### **READER COLOR:**

Black:	•
White:	•

# **TECHNICAL DRAWING:**

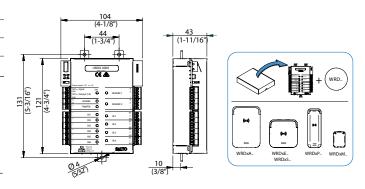

# **ELECTRICAL CHARACTERISTICS:**

#### Operations conditions:

	Min	Max	Unit
Temperature (non condesing):	0	60	°C
Humidity (non condensing):	35	85	%

### Power consumption:

Power consumption\*: 12V DC 400mA



<sup>\*\*</sup> Legic Prime and Legic Advant

<sup>\*</sup> Without the Wall Reader